


Products

- :: Brass BW 2 Parts Cable Glands
- :: Brass BW3 Parts Cable Glands
- :: Brass CW Cable Glands
- :: Brass CX Type Cable Glands
- :: Brass A2 Type Cable Glands
- :: Brass E1W Cable Glands
- :: Brass CXT Cable Glands
- :: Brass Marine Cable Glands
- :: Brass Metric Strain Relief Cable Glands
- :: Brass Wiping Cable Glands
- :: Brass PG Cable Glands
- :: Brass Cable Glands Accessories

Brass CX Type Cable Glands

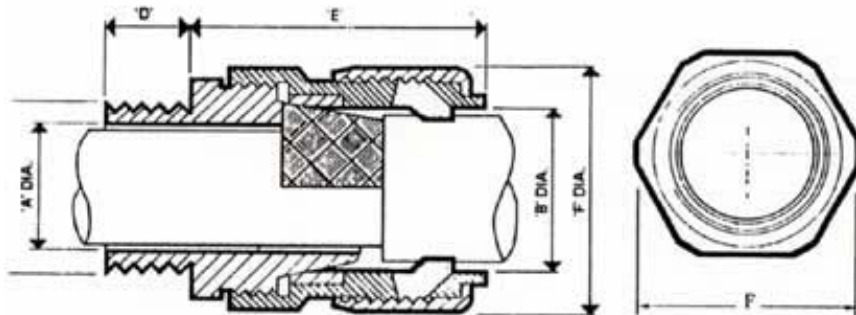

Metric thread entry size MM	Dimensions			Braid thickness maximum MM	Equivalent imperial thread size inches	Minimum entry thread length 'D' MM	Assembled length excl. thread entry 'E' MM Appx. (maximum)	Brass lock nuts A/F in mm	Hexagon Size 'F' on gland body MM (A/F)
	Bore 'A'		Cable 'B'						
	MM	MIN MM	MAX MM						
20 / 16	8.7	8.0	13.5	0.85	3/4	10.0	41	22	23
20S	11.7	11.2	16.0	0.85	3/4	10.0	44	24	23
20	14.0	13.2	21.0	0.85	3/4	10.0	46	24	26
25	20.0	15.5	24.0	0.9	1	10.0	51	30	33
32	26.3	26.4	34.0	1.25	1 1/4	10.0	51.5	36	41
40	32.2	31.5	40.5	1.4	1 1/2	15.0	55	46	50
50S	38.2	36.4	46.8	1.4	2	15.0	54.5	55	61
50	44.1	42.9	52.8	1.4	2	15.0	70	55	63
63S	50.0	46.8	60.5	1.5	2 1/2	15.0	80	70	84
63	56.0	58.4	65.5	1.5	2 1/2	15.0	80	70	85
75S	62.0	60.0	71.8	1.5	3	15.0	96	80	100
75	68.0	66.7	78.1	1.5	3.	15.0	96	80	100

S denotes small cable entry size

Products

- :: Brass Flexible Conduit Fittings Cable Glands
- :: Brass Lock Nuts
- :: Brass Stop Plugs Blind Plugs
- :: Brass Thread Reducers Enlargers Converters
- :: Copper Cable Lugs and Terminals
- :: Conduit Fittings Accessories
- :: Rubber Grommets For Conduit Boxes
- :: Brass Cable Gland Selection Chart
- :: Brass Neutral Links Neutral Bars
- :: Brass Terminal Blocks
- :: Brass Terminals Terminal Bars

Material:	Free Cutting Brass IS 319 type (i) or Free Cutting Brass as per BS 249 CZ 121 CDA 360 grade Brass type (i) or High Grade Free Cutting Brass or Any special Brass Material Composition as per customers requirement
Threads :	ISO Metric (MM Threads).
Finish And Coating :	Natural, Nickel Plated, Tin Plated or any coating as per customer specification.
Standard:	BS6121 Part 1
Cable Type:	Wire Braid or Steel Tape Armour
Armour Clamping:	Three part armour lock
Sealing :	TPE (Thermoplastic Elastomer)

Any kind of special Brass Cable Glands can be developed and supplied exactly as per customer specifications.

Brass Cable Glands India

Click Here to Visit Our Website : www.cable-glands-brass.com

**Plot 10 - B GIDC Industrial Estate,
Jamnagr, Gujarat 361005 India.**

Tel No : +91-22- 43449300, +91-22- 43449323

Fax No : +91- 22-22834046, +91-22- 40023682

